naffect! he is the meanin, as

## CENTRAL INTELLIGENCE AGENCY

## INFORMATION REPORT

This Document contains information affecting the National Defense of the United States, within the meaning of Title 18, Sections 793 and 794, of the U.S. Côde, as amended. Its transmission or revelation of its contents to or receipt by an unauthorized person is prohibited by law. The reproduction of this form is prohibited.

	SECURITY INFO			50X1-H	UM —
OUNTRY	USSR (Kalinin Oblast)		REPORT		
	Water Canal Development at Bran	nch No. 1,	DATE DISTR.	21 October 1953	i ,
UBJECT	Institute 88, Gorodomlya Island	d	NO. OF PAGES	7 50X1-HU	M
ATE OF INFO			REQUIREMENT		
LACE ACQUIRE	P		REFERENCES	50X1-H	UM
	THE SOURCE EVALUATIONS IN THE APPRAISAL OF C	THIS REPORT A	ARE DEFINITIVE.	· 50X1-HL	M
tice for pli of pos of mer	water canal at Ostashkov n on Gorodomlya Island investigations of two-dimension city which resulted in low-cost models for the water canal was s sible to observe an experiment i time, whereas such time is very tation is not possible during th it will never be pos asl for the wind tunnel, although abor of the very expensive wind tary experiments in a water canal.	experiments impler that n a water a limited in se operation sible to co it is pos- cunnel expe-	vs. Its advantage s. Furthermore, the n for the wind tunn canal for an unlime the wind tunnel, a n of the wind tunn completely substitut sible to greatly re-	was its sim- ne production nel. It is ited period and experi- el.  te the water sox1-H educe the	
tice for pli of pos of mer turn inc	n on Gorodomlya Island investigations of two-dimension city which resulted in low-cost models for the water canal was s sible to observe an experiment i time, whereas such time is very ntation is not possible during th it will never be pos-	experimental impler that n a water limited in the operation sible to continuous it is pos cannel expension the water continuous	7 was use. Its advantage s. Furthermore, the for the wind tunned the wind tunned, and of the wind tunned ompletely substituted in the wind tunned of the wind tunned	was its sim- ne production nel. It is ted period and experi- el. te the water educe the g out prelim- was the wave problem. Its	
tice for pli of pos of mer turn inc	n on Gorodomlya Island investigations of two-dimension city which resulted in low-cost models for the water canal was s sible to observe an experiment i time, whereas such time is very ntation is not possible during th it will never be pos all for the wind tunnel, although there of the very expensive wind the ary experiments in a water canal.	experimental impler that n a water limited in the operation sible to continuous it is pos cannel expension the water continuous	7 was use. Its advantage s. Furthermore, the for the wind tunned the wind tunned, and of the wind tunned ompletely substituted in the wind tunned of the wind tunned	was its sim- ne production nel. It is ted period and experi- el. te the water educe the g out prelim- was the wave problem. Its	
tice for pli of pos of mer turn income.	n on Gorodomlya Island investigations of two-dimension city which resulted in low-cost models for the water canal was s sible to observe an experiment i time, whereas such time is very ntation is not possible during th it will never be pos all for the wind tunnel, although abor of the very expensive wind t ary experiments in a water canal.  main difficulty in the use of t ich formed at the bow, for which t fluence was to be countered by th	experimental impler that n a water limited in the operation sible to continuous it is pos cannel expension the water continuous	7 was use. Its advantage s. Furthermore, the for the wind tunned the wind tunned, and of the wind tunned ompletely substituted in the wind tunned of the wind tunned	was its sim- ne production nel. It is ted period and experi- el. te the water educe the g out prelim- was the wave problem. Its	IUM

50X1-HUM SECRET -2-

inadvisable to go too far in this respect because the influence of the boundary layer which develops at the bottom then becomes noticeable.

50X1-HUM-

- A further difficulty can occur if processes are used which develop adiabatically rather than isothermally. As is known, the analogy does not then accurately apply. Compression shocks are examples of non-isothermal phenomena.
- 4. However, these factors cannot considerably reduce the usefulness of the water canal, especially if sufficient consideration is given to them during, or in the evaluation of the experiments.
- The essential theory for this work appears in an article written by E. PREISWERK, entitled "Applications of the Methods of Gas Dynamics to Water Flows with Free Surfaces".
- 6. All of the equipment except the basin was built at Ostashkov; the basin was built in Moscow (at NII-88 (?)) after the Germans had departed. Dr. SCHMIEDEL had built the small basin see Figure 2 page 6 7 and had designed the large basin see Figure 1, page 5 2 before he died.

50X1-HUM

7. The Soviets showed very little interest in this work, and were contemptuous of it, making no effort to hide their objections as to its practicability. They changed their attitude however, and agreed that the method had real value.

50X1-HUM

But they still seemed uninterested in the details.

8. 50X1-HUM

Five problems

Investigation of the analogy between water flow and gas flow (gas with K=2) on models.

This investigation compared the water levels with the pressure or densities calculated for gas with K = 2.0. Theoretically, an analogy exists between the density of the gas and the depth of the water.

The following models were examined with various angles of incidence ( ):

Plates (100, 200, 300 millimeters in length)
 Wedges /see Figure 4, page 6 /.
 Models with eval contour /see Figure 5, page 6 /.

The following were measured:

- (1) The water level on the model by reading the level with a gauge which is fastened to the model.
- The water level on the model by use of a height meter zee Figure 7, page 7
- The tangential and normal force by use of the balance /see Figure 3, page 6 /.

SECRET

50X1-HUM

and the same of the same

The coefficients were thus calculated.

In general, the analogy was confirmed by the experiments. Deviations were observed because of the wave which formed at the bow of the model. There is no analogy for it in the flow of gas. In order to keep the influence of this deviation small, the models must not be too small (200-300 millimeters) and the water level not too great.

- b. Investigation of the analogy as it applies to jets.

  Measurements were made on a model /see Figure 6, page 7 / which had been constructed for M = 2 (M is used here as Mach number). The water level was measured along the middle axis and on the sides of the model. The values obtained correspond to those which are anticipated according to the analogy.
- Investigation of the stern resistance as it applies to various models.

The stern resistance for various models as it depends on the Mach number was examined and the results were compared with the values known from literature. Specifically, the influence of the length of the model on stern drag was examined.

The water level was measured at the stern of the model, and from it the coefficient of resistance was determined. Pictures were taken of the water flow.

In agreement with the values available in literature, the coefficient of resistance is at its maximum if  $M \longrightarrow 1$ . As the Mach number increases it becomes smaller, and beginning with  $M \longrightarrow 2.5$  it corresponds to the value which would exist if  $h \longrightarrow 0$  (for gas, this corresponds to  $P \longrightarrow 0$ ).

d. Investigation of the discharge from jets with straight walls.

The thrust produced by a jet depends upon the jet angle and the ratio of diameters d<sub>2</sub> / d<sub>1</sub>.

This influence was to be examined through experiments in the water canal with various outside pressures. Outside pressure (Aussdruck-Gegendruck) is pressure (water height) measured several centimeters ahead of the model.

The models with  $(2-20 \text{ to } 90^\circ)$  and with various lengths were examined. The water level was determined along the axis, along the wall, across the narrowest point, and across the exhaust aperture. From these measurements the thrust was determined. Pictures were also made of the current. Various outside pressures were produced by raising the baffle plate see Figure 1, page 5.

SECRET

50X1-HUM


The progress of current inside and outside of the jet was determined by means of the flow pictures. In some cases a separation of the current from the jet wall was observed. This separation occurs when the water level at the wall has dropped to the value of the water level outside of the jet (outside pressure). The conditions for maximal thrust could be determined.

50X1-HUM

e. Investigation of the use of diffusors for supersonic currents.

The assignment was to determine the degree of efficiency of diffusors for supersonic current for which the compression is accomplished either through a vertical shock or through one or several inclined shocks plus one vertical shock (Oswatitsch-Diffusor) (sic).

The following type models were built:






Dynamic pressures before and after conversion were measured [see Figure 8, page 7 ].


The experiments showed a great improvement in the degree of efficiency if "Oswatitsch" (sic) diffusors are used. The values measured corresponded quite closely to those claimed by theory.


SECRET


Sanitized Copy Approved for Release 2010/11/04 : CIA-RDP80-00810A001400120005-8

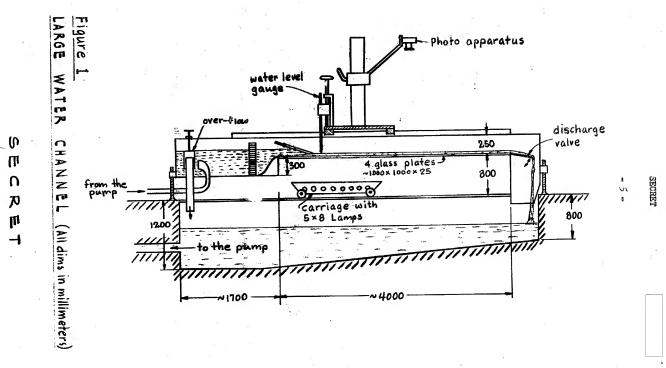

50X1-HUM

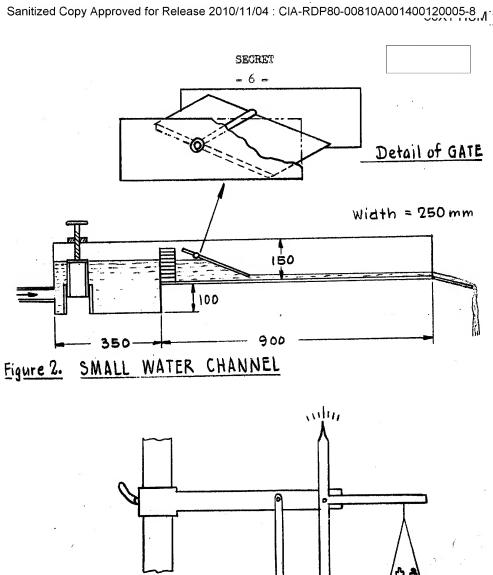

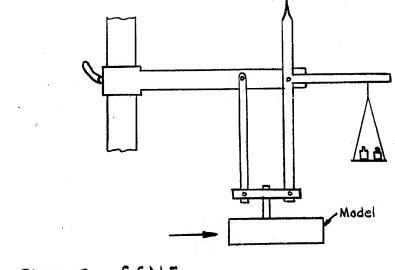

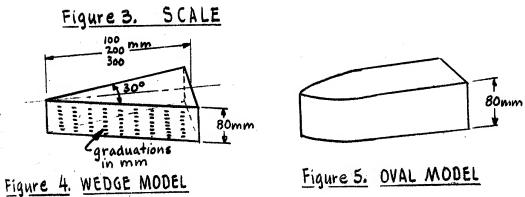

50X1-HUM

· 八三二十四日以下,安然中心不可能推断中国推断的人员的人,不可以是一个人的人,

